

Light Source AQ-4303B

Ideal light source for loss-wavelength characteristics measurement



General

The AQ-4303B is a white light source effective for loss-wavelength characteristics measurement of optical fibers and devices.

This wide-band, highly stable light source, which employs a high-power halogen lamp, provides CW light and 270 Hz square wave modulated light by the chopper incorporated.

The AQ-4303B also incorporates an optical filter that can be readily inserted by switch operation to remove higher-order optical components.

Features

- **Wide-band, highly stable output**

The AQ-4303B covers a band of 400 to 1800 nm and provides highly stable optical outputs with a deviation of ± 0.05 dB.

- **270Hz chopped light**

The AQ-4303B provides 270 Hz square wave modulated light by a chopper for low-level measurement.

- **Removal of higher-order optical components**

The built-in optical filter can be inserted by simple switch operation to prevent higher-order optical components from entering the band selected.

- **GP-IB remote control**

The AQ-4303B is provided as standard with a GP-IB remote-control function that enables automatic measuring system setup.

Applications

The AQ-4303B, in conjunction with the AQ-6315A/B Optical Spectrum Analyzer, is effective in measuring loss-wavelength characteristics of optical fibers and devices.

Light Source AQ-4303B


Specifications

Wavelength range	400 to 1800 nm
Output stability	±0.05 dB (at 20 °C, for 1 hour)
Output waveform	CW or 270 Hz chopped light
Output level	-45 dBm or more (50/125 μm GI fiber, wavelength of 850 nm and 1300 nm, bandwidth of 10 nm, CW)
GP-IB interface	Supplied as standard
Power requirements	AC 100 to 200V, 200 to 240V, 50/60 Hz, approx. 160 VA
Dimensions and mass	Approx. 212(W) x 133(H) x 250(D) mm, approx. 5 kg
Accessories	Power cord; 1, instruction manual; 1 copy

Note: The standard optical connector is FC type. Inquire for information on other optical connectors.

Measuring System

Typical measuring system for optical fiber loss-wavelength characteristics measurement

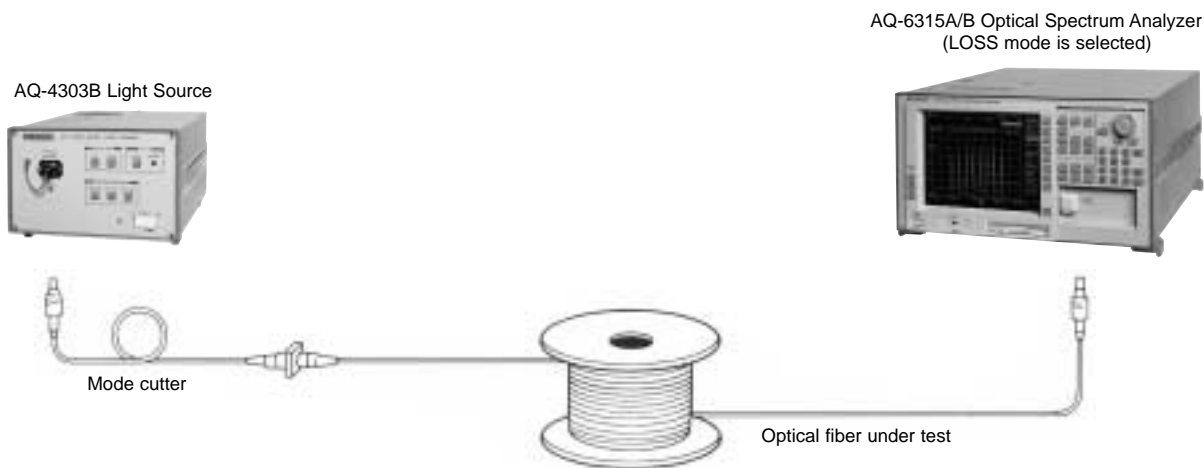

*Specifications are subject to change without notice.

Ando Electric Co., Ltd.

3-484, Tsukagoshi, Saiwai-ku, Kawasaki, Kanagawa, 212-8519 Japan Phone: +81 (0)44 549 7300 Fax: +81 (0)44 549 7450

Ando Corporation

20420 Century Boulevard Germantown, MD 20874, U.S.A. Phone: +1 301 916 0409 Fax: +1 301 916 1498

SAN JOSE OFFICE: 2021 N. Capitol Avenue, San Jose, CA 95132, U.S.A. Phone: +1 408 941 0100 Fax: +1 408 941 0103

Ando Europe B.V.

"Vijverdam", Dalsteindreef 57, 1112XC Diemen, The Netherlands Phone: +31(0)20 698 1441 Fax: +31(0)20 699 8938

NIEDERLASSUNG DEUTSCHLAND: Nymphenburger Straße 119 B, D-80636 München, Germany Phone: +49(0)89 143 8150 Fax: +49(0)89 143 81555

Ando Electric Singapore Pte. Ltd.

19 Kim Keat Road #05-03, Fu Tsu Building, Singapore 328804 Phone: +65 6251 1391 Fax: +65 6251 1987

Ando Shanghai Trading Co., Ltd.

Room 202, Citic Pent-OX Business Building, No. 1081 Pudong Ave. Shanghai, China 200135 Phone: +86 21 5821 6240 Fax: +86 21 5821 9254

Please visit our website for more information: www.ando.com