

300 Watt Power Amplifier ARI-300K

Features

- Frequency Range: DC to 300 kHz
- Up to 300 Watts Output Power into 1 or 2 ohms with less than 0.3% distortion
- Protection Circuitry from Input Overload, Over-Temperature & Over-Current
- Three-Year Warranty


Description


The Com-Power ARI-300K Power Amplifier is specifically geared for conducted and radiated susceptibility testing such as that described in MIL-STD-461 (CS101 & RS101) and RTCA DO-160 (Section 18), in addition to other standards.


The ARI-300K operates from DC to 300 kHz. Its output power capabilities exceed 300 Watts into 1 ohm or 2 ohm loads; 150 Watts into 4 ohms; and 75 Watts into 8 ohms (refer to graphs below for minimum output specifications).

The amplifier is equipped with protection circuitry to avoid damage in the case of input overload, improper output connections (shorted or improper loads), over-temperature as well as over-current conditions.

The digital front panel display indicates the internal temperature of the amplifier as well as the bias current. There are also LED indicators for over-temperature and over-current fault conditions.

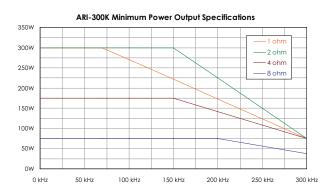

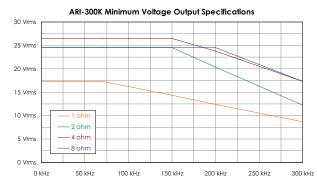

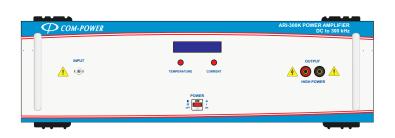

Specifications

Power Amplifier
Conducted/Radiated Susceptibility Testing
MIL-STD-461, RTCA DO-160, etc.
DC to 300 kHz
[see 'ARI-300K Min. Power Output Specifications' graph]
10 kΩ (nominal)
6.25 m Ω (nominal)
[see 'ARI-300K Min. Voltage Output Specifications' graph]
≤0.3%
< ±1.5 mV (after 30 minutes of operation)
±5 degrees (up to 75 kHz)
100-250 Volts AC (50/60 Hz) 1000 VA (maximum)
CTORS
BNC (female)
(2) x 4 mm Banana Jack Binding Posts
IEC C13 Receptacle
40° F to 104° F (5° C to 40° C)
Forced Air
6.125" x 19" x 23.25" (15.9 cm x 48.3 cm x 59 cm)
(3U) 5.25" x 19" x 22.25" (13.34 cm x 48.3 cm x 56.5 cm)

All values are typical, unless specified. All specifications are subject to change without notice.